



## Characteristics




- High pressure and small dimensions air curtains.
- Self-supporting casing construction made of zinc plated steel, finished in structural epoxy-polyester RAL 9016 as standard. Other colours or stainless steel construction are available on request.
- Low noise centrifugal double inlet fans driven by an external rotor motor with built in thermal protection contact. Provided with five speed selection.
- Perforated inlet grille with large absorbing surface to minimize the air pressure drop. It doesn't need filter.
- Anodised aluminium blow-out vanes, airfoil shaped, pitch angle adjustable each side.
- All models are without heating, air only.
- Control panel and 20m of telephonic cable with fast connectors type RJ45 (Plug & Play), included. Optional: Interface to connect to BMS.

## Specifications

Model	Airflow m <sup>3</sup> /h	Without heating Air only	Fans power 230V-50Hz kW	Fans current 230V-50Hz A	Noise level (3 m) dB(A)	Weight kg
COM 1000	1860		0,62	3,30	52	21
COM 1500	2480		0,83	4,40	53	32
COM 2000	3720		1,24	6,60	54	43
COM 2500	4340		1,45	7,70	55	55

## Dimensions

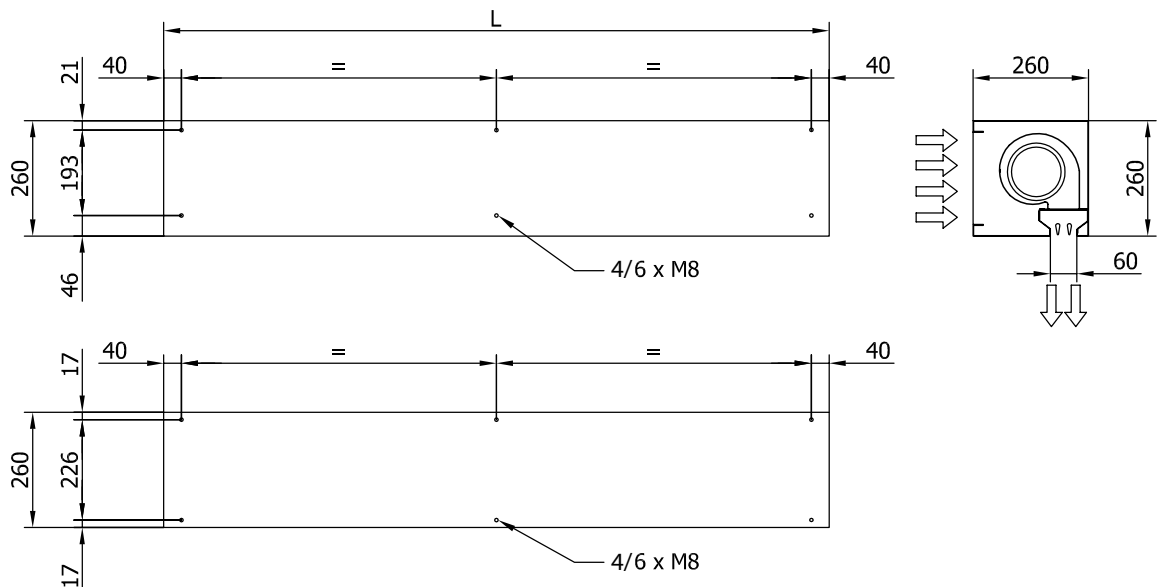

	L
COM 1000	1000
COM 1500	1500
COM 2000	2000
COM 2500	2500

